

Active infrared beams



Accessories



SB11/16/21/26/31
Kit for 2-sided view



SB53
Socket for SB series pillar



SB18
AIR Pillar climbing detector



PB50-H
12V non polarity heater 250mA for beam tower



PB50-T
Thermostat for beam tower



PB50-AC180
PB50-AC360
Anti climb top tamper for 180°/360° beam towers



SB52
Power Supply 230VAC to 12VAC & 12VDC



BS121N
Sealed Lead-Acid Battery 12V 1.2Ah VdS approved

Applications



Power Plant



Residence



Car rental parking

SB series

Beams

- SB250-N** AIR stand alone twin beam, 50m range
- SB2100-N** AIR stand alone twin beam, 100m range
- SB450-N** AIR stand alone quad beam, 50m range
- SB4100-N** AIR stand alone quad beam, 100m range
- SB4200-N** AIR stand alone quad beam, 200m range

Pillars

- SB10** Empty pillar 1 m
- SB15** Empty pillar 1.5 m
- SB20** Empty pillar 2 m
- SB25** Empty pillar 2.5 m
- SB30** Empty pillar 3 m

PB series

Beams

- PB501** Twin AIR beam 20m outdoor/40m indoor
- PB511** Twin AIR beam 40m outdoor/80m indoor
- PB521** Twin AIR beam 60m outdoor/120m indoor
- PB601** Outdoor Quad AIR beam 50m
- PB611** Outdoor Quad AIR beam 100m
- PB621** Outdoor Quad AIR beam 200m

Pillars

- PB10** 1m – 180° AIR Beam Tower
- PB15** 1.5m – 180° AIR Beam Tower
- PB20** 2m – 180° AIR Beam Tower
- PB30** 3m – 180° AIR Beam Tower
- PB11** 1m – 360° AIR Beam Tower
- PB16** 1.5m – 360° AIR Beam Tower
- PB21** 2m – 360° AIR Beam Tower
- PB31** 3m – 360° AIR Beam Tower

Outdoor motion sensors



Accessory



DI601-WT
Walk tester for DI601 and DDI602 series

Applications



Retail



Residence



Warehouse

DI601, DDI602 series

- DI601** Outdoor PIR 10/20/30m - 33/66/98ft selectable
- DI601-WT** Walk tester for DI601 and DDI602 series
- DDI602-F1** Outdoor Dual Technology detector 10.525 GHz 10/20/30m - 33/66/98ft selectable
- DDI602-F2** Outdoor Dual Technology detector 10.587 GHz 10/20/30m - 33/66/98ft selectable
- DDI602-F3** Outdoor Dual Technology detector 9.9 GHz 10/20/30m - 33/66/98ft selectable

TX-2810 series

- TX-2810-03-4** Wireless Outdoor PIR 868AM Gen2

Outdoor microwave sensors



Accessories



MRW01
Alignment tool



MRW02-N
Power supply 230 VAC/19 VAC with IP66 enclosure



MRW03
Pair of inox poles 120cm



BS122N
Sealed Lead-Acid Battery 12V 2.2Ah

Applications



Airports



Prisons



Military base

MRW Series

The Netherlands, Belgium, UK, Denmark, Italy, Sweden, Ireland, Poland, Norway, Finland

- MRW50-F1** Outdoor Microwave Motion Sensors, 10.5 GHz, 50m
- MRW100-F1** Outdoor Microwave Motion Sensors, 10.5 GHz, 100m
- MRW200-F1** Outdoor Microwave Motion Sensors, 10.5 GHz, 200m


France, Austria, Portugal, Czech Republic

- MRW50-F2** Outdoor Microwave Motion Sensors, 9.9 GHz, 50m
- MRW100-F2** Outdoor Microwave Motion Sensors, 9.9 GHz, 100m
- MRW200-F2** Outdoor Microwave Motion Sensors, 9.9 GHz, 200m


Spain, Luxembourg

- MRW50-F4** Outdoor Microwave Motion Sensors, 10.525 GHz, 50m
- MRW100-F4** Outdoor Microwave Motion Sensors, 10.525 GHz, 100m
- MRW200-F4** Outdoor Microwave Motion Sensors, 10.525 GHz, 200m


Fence, roof and wall protection sensors

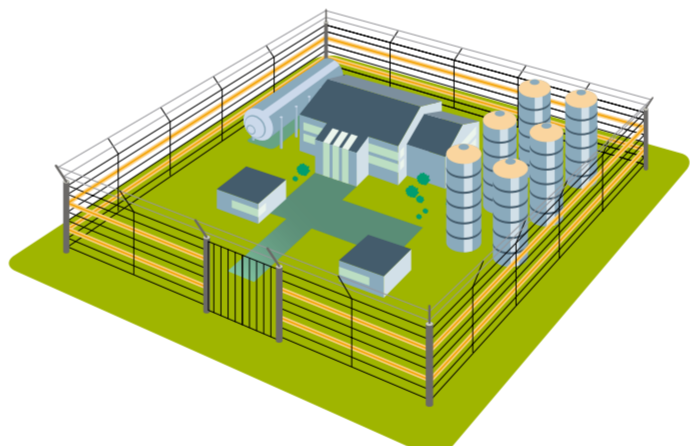


Accessories




DF950-CM
Universal Configuration Module (UCM) Software kit with interface cable




DF863
Splice and Terminator Kit for microphonic cable




DF852
Non-sensitive lead-in cable for microphonic sensor cable, 30m roll



DF962
Quick disconnect gate assembly kit




DF963
Gate Bypass Module, Locally Activated by Keyswitch




DF964
Gate Bypass Module, remotely activated by computer control


Applications



Retail



Car rental parking



Communication

Fence protection

- DF951** FlexPS processor in NEMA 4 enclosure, 12-48 VDC

Network option

- DF955-C1** Multi-mode fiber (MMF) comm card
- DF955-C2** EIA-422 copper comm card
- DF955-U** Fence protection Network Interface Unit
- DF955-SW** Network Manager SW CD
- KTP-12DCU-UK** Switching Power Supply, 1A, 12VDC
- DF851** Fence protection microphonic sensor cable - 300m (984 ft) roll

Roof / Wall protection

- DF450** FlexPI processor in rugged plastic enclosure