

TruPortal™ Access Control

2-Door Base System



OVERVIEW

TruPortal offers an IP Appliance-Based Access Control System integrated with the TruVision™ line of video products. Designed for the over-the-counter market, this solution is also ideal for small- to medium-sized commercial buildings. The easy-to-install system features a browser-based interface that does not require specialized training, additional software or licensing. Plus, a companion iPad app enables users to remotely monitor system activity and perform basic administrative tasks, such as adding or deleting users.

The system provides up to five clients simultaneously with real-time information, event monitoring and video integration. A user-friendly interface, online help files, built-in tool tips, intuitive searching and flexible reporting methods all ensure a frustration-free user experience. The interface is available in five languages: English, Dutch, French, Spanish and Portuguese.

TruPortal also allows hardware interfacing with up to 132 digital inputs for unlocking doors in case of emergency, while pre-configured roll-call reports enable easy verification of persons still on the premises. Integration with two separate video products (TVR 10 and TVR 30) provides in-browser video verification and alarm tagging.

End-user administration of the system is made easy with built-in wizards that guide the administrator through the different setup screens, as well as items like Access Levels, Schedules, Holidays and Reader Lists. The access control database features 10 customizable user-defined fields. Multiple levels of operators can be configured, with five levels incorporated by default.

STANDARD FEATURES

- Web-based application without additional software or licensing
- Seamlessly links video to access control system
- Video can be viewed and controlled via browser
- Monitor and control up to 132 inputs and 66 outputs
- iPad app allows remote access and monitoring
- Simple system installation requires no special training
- User-friendly interface and built-in configuration wizards
- Hardware discovery on initial and subsequent hardware installations
- Utility for Import/Export of cardholders
- FCC, Class A and CE compliant
- Supports up to 10,000 persons and 10,000 credentials with 5 credentials per person
- Supports up to 64 access levels with 8 levels of access per credential
- Supports up to 64 schedules with 6 intervals per schedule
- Supports up to 64 reader groups, 32 operator roles, 8 free configurable card formats, and 64 readers or doors in a flexible configuration
- Supports DVRs: TVR 10 and TVR 30 with a maximum of 64 cameras and maximum 4 DVRs

Key Functions




Installation/Ease-of-Use Features

Wizards walk users through installation and other common tasks, while Tool Tips provide descriptions of system features.



Customizable Configuration

Cardholder database offers customized fields to track and generate reports.

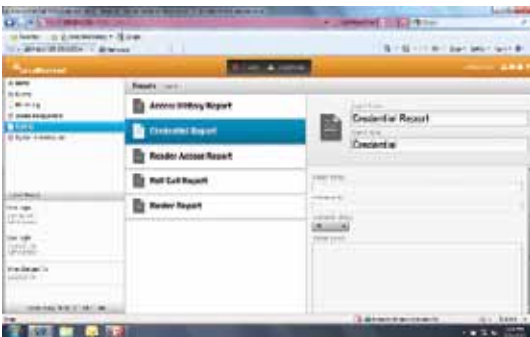

Reports


Easily customize reports and filter based on individuals, locations or times.




Seamless Video Integration

Associate and control video related to access control system events.

System Diagram

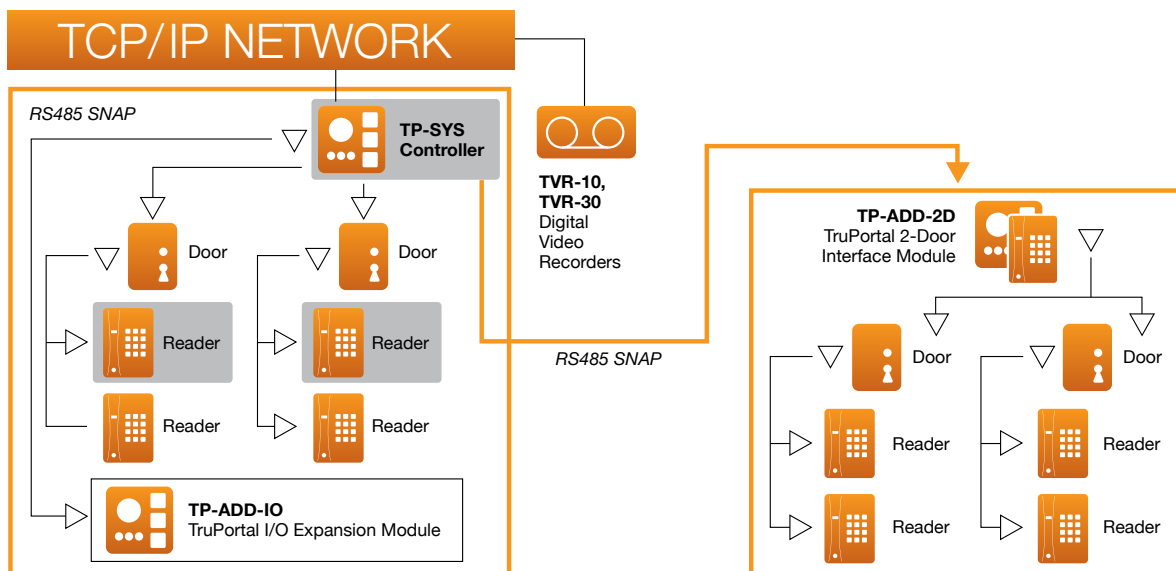

Application Drawing

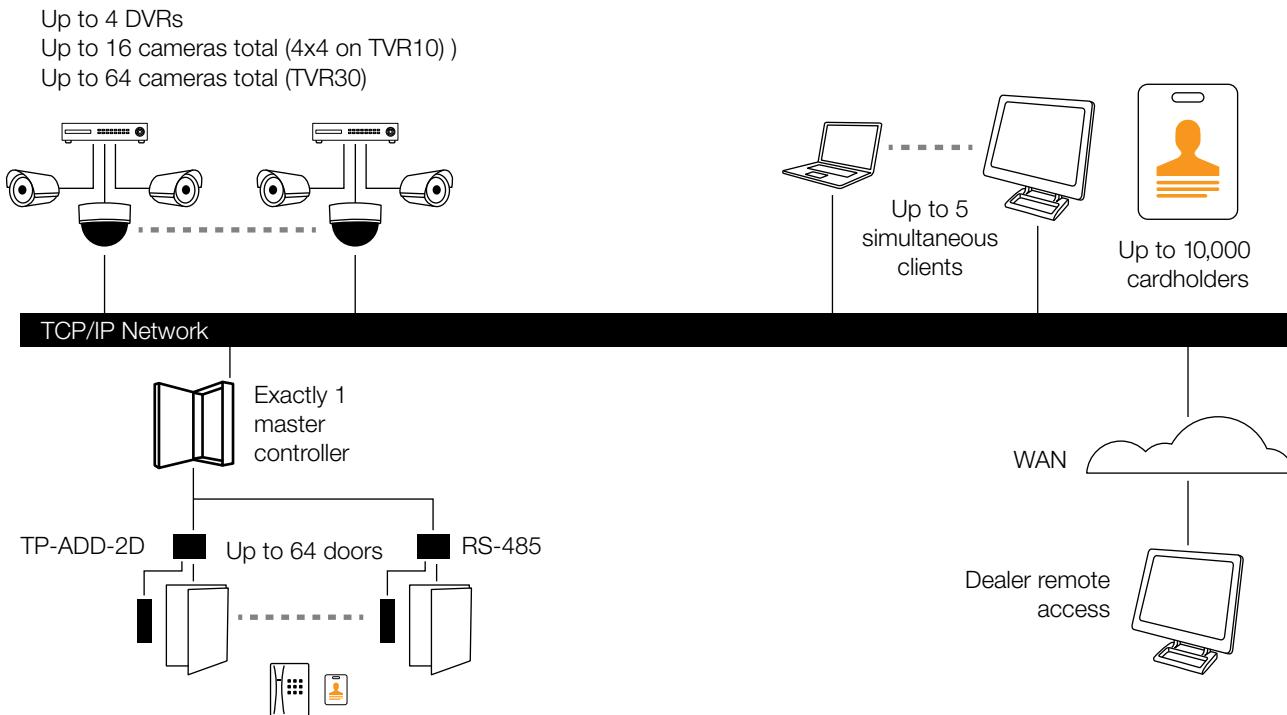

Specifications

Description

Cardholders and Credentials	Up to 10,000 total (up to 5 credentials per cardholder)
Doors and Readers	Expandable to 64 doors or 64 readers
Access Levels	64 total (up to 8 per credential)
Anti-Passback	Up to 64 areas (Hard/Soft modes configurable per reader)
Event History	65,000 historical events
Schedules and Holidays	64 schedules/255 holidays
Enclosure Size (WxHxD)	21-1/4 x 13-5/8 x 4-1/4 in.
Certifications	UL, RoHS, CE
Hardware Recommendation	Intel Pentium 4 2.8 GHz Processor 1 GB of memory 512 MB Video Card 1 GB free disk space 10/100 Ethernet Network Interface Card 1024 x 768 screen resolution
Video Performance	Directly depends on the available RAM and the processor.
Software Requirements	Microsoft Windows XP SP3 32-bit, or Microsoft Windows 7 32- and 64-bit IBM-Compatible PC Bonjour Print Services .NET 4.0 framework Adobe Flash plug-in 10.6+

Supported Readers	Supports Wiegand Data1/Data0
Typical Credential Technologies	125 kHz 13.56 MHz(ISO 15693 &14443A, B)
Typical Proximity Cards	Interlogix Proximity HID® Proximity HID® Proximity Corp. 1000
Typical Smart Cards	MIFARE® (ISO 14443A) card serial number (CSN) MIFARE®/DESFIRE® CSN Vicinity (ISO 15693) CSN HID® iCLASS® CSN
Supported Digital Video Recorders	TruVision™ DVR 10 TruVision™ DVR 30
Supported Browsers	Windows Internet Explorer Version 7, 8 (video features only supported with IE, Recommend IE8) Chrome, version 8 Safari, version 5 FireFox, version 3.6

TruPortal™ Access Control

2-Door Base System

North America
T 855-286-8889

Asia
T 852-2907-8108

Australia
T 61-3-9239-1200



Europe
T 32-2-725-11-20

Latin America
T 561-998-6100

Ordering Information

Base Systems	
TP-SYS-2D	TruPortal™ 2-Door Base System. Consists of a TruPortal System Controller installed in UL listed enclosure w/integrated power supply/standby battery charger.
TP-SYS-2D2R	TruPortal 2-Door Base System with readers. Consists of a TP-SYS-2D bundled w/2 readers and 5 credentials.
TP-SYS-BRD	TruPortal System Controller. For spare parts only.
Add-Ons	
TP-ADD-2D	TruPortal 2-Door Add-on Kit. Consists of a TruPortal 2-Door Interface Module installed in UL listed enclosure w/4 AMP power supply.
TP-ADD-2D2R	TruPortal 2-Door Add-on Kit with readers. Consists of a TruPortal 2-Door Interface Module installed in UL listed enclosure w/4 AMP power supply. Includes 2 Readers.
TP-ADD-2D-BRD	TruPortal 2-Door Interface Module. Board only.
TP-ADD-IO	TruPortal I/O Expansion Add-on Kit. Consists of a TruPortal 16 input, 8 output I/O Expansion Module installed in a UL listed enclosure w/4 AMP power supply.
TP-ADD-IO-BRD	TruPortal I/O Expansion Module. Board(s) only. 16 inputs and 8 relay output (consists of 2 separate but interconnected boards). For spare parts or for installation into an existing TP-SYS-2D
Readers	
TP-RDR-100A	TruPortal T-100 Series Reader (mini-mullion mount, ProxLite/HID®, 3 covers, 18"/45.7cm pigtail wire, Wiegand output)
TP-RDR-100B	TruPortal T-100 Series Reader (mini-mullion mount, ProxLite/HID®, 3 covers, 84"/214cm pigtail wire, Wiegand output)
TP-RDR-200A	TruPortal T-200 Series Reader (mini-mullion mount, Vicinity (ISO 15693)/Proximity (ISO14443), 3 covers, 18"/45.7cm pigtail wire, Wiegand output)
TP-RDR-200B	TruPortal T-200 Series Reader (mini-mullion mount, Vicinity (ISO 15693)/Proximity (ISO14443), 3 covers, 84"/214cm pigtail wire, Wiegand output)
Note: Backup battery must be purchased separately.	
Accessories	
TP-RDR-LRN	Dual-Frequency Enrollment Reader
Credentials	
TP-PRX-CLAM-50PK	TruPortal Credential - HID® Proxcard® II Clamshell Design Cards - 50 Pack
TP-PRX-KF-50PK	TruPortal Credential - HID® Prox Keyfobs - 50 Pack
TP-PRX-ISO-50PK	TruPortal Credential - HID® Prox ISO Cards - 50 Pack
TP-MFC-ISO-50PK	TruPortal Credential - MIFARE® Classic ISO Cards no Magstripe Gloss/Gloss - 50 Pack
TP-MFC-ISOM-50PK	TruPortal Credential - MIFARE® Classic ISO cards 27500E Magstripe Gloss/Gloss - 50 Pack
TP-MFC-KF-BK-25PK	TruPortal Credential - MIFARE® Classic Keyfobs Piano Black - 25 Pack
TP-MFC-KF-RD-25PK	TruPortal Credential - MIFARE® Classic Keyfobs Piano Red - 25 Pack
TP-MFC-KF-OG-25PK	TruPortal Credential - MIFARE® Classic Keyfobs Piano TruPortal Orange - 25 Pack
TP-MFC-KF-LG-25PK	TruPortal Credential - MIFARE® Classic Keyfobs Epoxy Slender - TruPortal Orange - 25 Pack
TP-CP-KF-BK-25PK	TruPortal Credential - Interlogix Prox Keyfobs Piano Black - 25 Pack
TP-CP-KF-RD-25PK	TruPortal Credential - Interlogix Prox Keyfobs Piano Red - 25 Pack
TP-CP-KF-OG-25PK	TruPortal Credential - Interlogix Prox Keyfobs Piano TruPortal Orange - 25 Pack
TP-CP-KF-LG-25PK	TruPortal Credential - Interlogix Prox Keyfobs Epoxy Slender - TruPortal Logo - 25 Pack

Dimensional Diagram

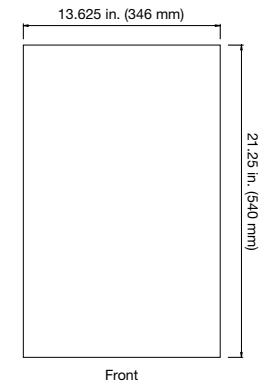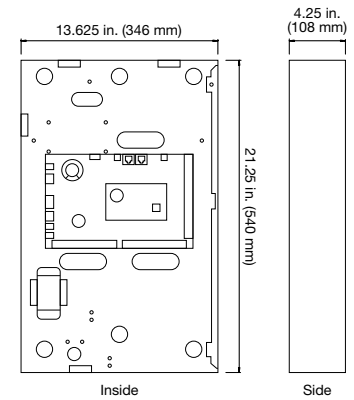

interlogix.com

Specifications subject to change without notice.

2012 Interlogix. All rights reserved.

203-3509 2012/05 (69334)